

Original research article / Научная статья

UDC 625.088

DOI: <https://doi.org/10.31660/2782-232X-2025-3-55-73>

EDN: <https://elibrary.ru/dnfpso>

2.1.8 Design and construction of roads, subways,  
airfields, bridges, and transportation tunnels  
(engineering sciences)



## Environmental impact of asphalt concrete plants on industrial areas via criteria-based method assessing

Nikolay I. Shestakov<sup>1</sup>, Nina V. Danilina<sup>1</sup>, Roman S. Fediuk<sup>2,3</sup>✉, Mohammad Hematibahar<sup>1</sup>, Valery I. Petukhov<sup>4</sup>

<sup>1</sup> National Research Moscow State University of Civil Engineering  
Moscow, 26 Yaroslavskoe Highway, 129337, Russian Federation

<sup>2</sup> Vladivostok State University  
Vladivostok, 41 Gogolya St., 690014, Russian Federation

<sup>3</sup> Far Eastern Scientific Research, Design and Technological Institute for Construction  
Vladivostok, 14 Borodinskaya St., 690033, Russian Federation

<sup>4</sup> Far Eastern Federal University  
Vladivostok, Russky Island, 10 Ajax Bay, 690922, Russian Federation

✉ roman44@yandex.ru

 **Abstract.** The study addresses the environmental risks posed by asphalt concrete plants operating in industrial zones, focusing on their impact on air, soil, and water resources. The objective was to develop and test an integrated criteria-based methodology for assessing such impacts. Three asphalt concrete plants with different production capacities and gas-cleaning efficiencies were selected as the research objects. The methodology included sequential evaluation in five areas: territorial impact, geological conditions, atmospheric emissions, soil degradation, and water pollution. Data collection involved satellite imagery, cadastral surveys, laboratory analyses of air and soil samples, and field observations. The results show that plants with higher production capacity generate significantly greater environmental loads, with CO<sub>2</sub> and NO<sub>x</sub> emissions exceeding permissible levels, and with notable soil degradation and risks to hydrogeological stability. The discussion highlights that upgrading gas-cleaning units, implementing continuous water quality monitoring, and restoring disturbed soils are essential to mitigate the negative impacts. The proposed methodology proved effective for comprehensive environmental risk assessment and can be applied to other industrial facilities with similar environmental profiles.

**Keywords:** asphalt concrete plants, environmental impact, industrial zones, air emissions, soil degradation, hydrogeological stability, impact boundaries

**For citation:** Shestakov N. I., Danilina N. V., Fediuk R. S., Hematibahar M., Petukhov V. I. Environmental impact of asphalt concrete plants on industrial areas via criteria-based method assessing. *Architecture, Construction, Transport*. 2025;5(3):55–73. <https://doi.org/10.31660/2782-232X-2025-3-55-73>

## Критериальный метод оценки воздействия асфальтобетонных заводов на окружающую среду в промышленных зонах

Н. И. Шестаков<sup>1</sup>, Н. В. Данилина<sup>1</sup>, Р. С. Федюк<sup>2,3</sup>✉, М. Хематибахар<sup>1</sup>, В. И. Петухов<sup>4</sup>

<sup>1</sup> Национальный исследовательский Московский государственный строительный университет  
Москва, Ярославское шоссе, 26, 129337, Российская Федерация

<sup>2</sup> Владивостокский государственный университет

Владивосток, ул. Гоголя, 41, 690014, Российская Федерация

<sup>3</sup> Дальневосточный научно-исследовательский институт по строительству

Владивосток, ул. Бородинская, 14, 690033, Российская Федерация

<sup>4</sup> Дальневосточный федеральный университет

Владивосток, о. Русский, п. Аякс, 10, 690922, Российская Федерация

✉ roman44@yandex.ru



**Аннотация.** В процессе работы асфальтобетонных заводов в промышленных зонах возникают экологические риски, связанные с загрязнением воздуха, почвы и водных ресурсов. Авторы ставили перед собой цель разработать и проверить на практике метод комплексной критериальной оценки такого негативного воздействия. В качестве объектов исследования были выбраны три асфальтобетонных завода с различными производственными мощностями и эффективностью газоочистки. Предложенный метод предполагает последовательную оценку пяти критерии: влияния на территорию, геологических условий, выбросов в атмосферу, деградации почв и загрязнения вод. Сбор данных включал изучение спутниковых снимков, кадастровые исследования, лабораторный анализ проб воздуха и почвы и полевые наблюдения. Полученные результаты подтверждают, что предприятия с более высокими производственными мощностями оказывают значительно большее негативное воздействие на окружающую среду: превышены допустимые уровни выбросов  $\text{CO}_2$  и  $\text{NO}_x$ , что ведет к деградации почв и риску гидрогеологической нестабильности. Для нейтрализации негативного воздействия необходимы модернизация газоочистных установок, постоянный мониторинг качества воды и рекультивация почв. Метод комплексной критериальной оценки может быть применен и для оценки других промышленных объектов с аналогичными характеристиками.

**Ключевые слова:** асфальтобетонные заводы, экологическое воздействие, промышленные зоны, промышленные выбросы, деградация почв, гидрогеологическая устойчивость, площадь воздействия

**Для цитирования:** Шестаков Н. И., Данилина Н. В., Федюк Р. С., Хематибахар М., Петухов В. И. Критериальный метод оценки воздействия асфальтобетонных заводов на окружающую среду в промышленных зонах. *Архитектура, строительство, транспорт*. 2025;5(3):55–73. <https://doi.org/10.31660/2782-232X-2025-3-55-73> EDN: DNFPSO



## 1. Introduction / Введение

In the context of accelerated urbanization and expansion of infrastructure projects, environmental protection issues are of particular importance [1–3]. Asphalt concrete production plants play a key role in the development of urban and industrial zones, but their activities are associated with serious environmental risks [4, 5]. These risks are associated with negative impacts on ecosystems, which can manifest themselves in both the short and long term [6].

Despite significant developments in environmental research, significant gaps remain, particularly in the long-term impact of industrial facilities on industrial zone ecosystems [7]. Existing assessment methods tend to focus on short-term effects and do not fully take into account the complex interrelations of environmental factors [8, 9]. This is of particular concern, as long-term environmental impacts may be significantly more serious and difficult to reverse.

The main problem is the lack of a clear formulation of the main environmental factors associated with the activities of asphalt concrete plants. Uncertainty in defining the objects and subject of research hinders the creation of effective management strategies.

In Russia, a comprehensive regulatory system for environmental impact assessment of asphalt concrete plants has been established and is legally enforced. It includes risk assessment for public health and relies on a large package of regulatory documents (federal laws, sanitary norms, state standards) and

certified software tools. However, existing procedures are often fragmented: they separately consider atmospheric emissions, soil pollution, or hydrological risks, without providing an integrated picture of cumulative effects. The methodology proposed in this study does not replace the regulatory framework but complements it, offering a multiparametric assessment that integrates territorial-geometric and physical impact parameters. This closes a gap in current practices, ensuring a more complete and systemic evaluation of environmental risks.

Thus, there is a need to develop and test new integration methods capable of taking into account a wide range of environmental and technological parameters. These methods should provide more detailed data that can be used as a basis for making management decisions and strategic planning. The solution to these problems will not only expand the existing scientific base, but will also significantly improve the management of environmental risks associated with the activities of asphalt concrete plants.

Production facilities located in industrial zones pose a serious problem because they generate a wide range of pollutants that affect ecosystems [10, 11]. Such facilities affect large areas, disrupting natural processes, which makes it necessary to study their impact on the environment in greater depth and develop specialized approaches to managing and reducing negative impacts.

Industrial zones located in close proximity to urban agglomerations are a source of significant environmental risks. The problem is aggravated by the fact that many existing environmental impact assessment methods do not take into account the full picture and are based on outdated data [12].

There is an urgent need to develop new, more comprehensive approaches to environmental safety assessment that would be able to integrate various environmental parameters and provide accurate data for decision making.

Existing studies on the impact of asphalt concrete production facilities on ecosystems often focus on direct effects [13, 14], such as soil and water pollution [15], habitat fragmentation and noise pollution [16–18]. However, the issue of taking into account long-term effects and an integrated approach to assessing interrelated ecological processes remains important, which requires the development of more complex models [19].

Numerous studies demonstrate that the integration of industrial ecology principles can significantly improve the effectiveness of managing environmental challenges, especially in port areas [20–23]. However, although these works have made significant contributions, they do not sufficiently take into account the complex interactions between different environmental parameters, which significantly limits their applicability in the broader context of industrial zones.

The paper pays special attention to the spatio-temporal dynamics of ecosystem changes in megacities, emphasizing the importance of using complex spatial models to accurately assess these processes [24, 25]. However, to gain a deeper understanding of ecological transitions, further research is needed to complement existing data.

A literature review has shown the significant impact of various industrial facilities on ecosystems, especially in the context of using complex models to predict environmental effects [26, 27]. In particular, the study demonstrated that traditional assessment methods do not always accurately account for the interaction of factors at the level of large industrial zones.

Research also shows that integrating ecosystem functions with business processes helps to more effectively manage environmental risks and reduce the negative impact of industrial facilities [28–30]. These studies highlight the need for joint use of environmental indicators to improve planning and monitoring of industrial zones.

In addition, emphasis is placed on the need to take into account complex ecosystem interactions, as well as the development of additional indicators and methods to improve the environmental sustainability of industrial facilities [31–33].

A number of studies have analyzed a wide range of approaches to managing industrial development [34–36] and its environmental impacts, highlighting the importance of integrating environmental and sustainability strategies into the planning and operation of industrial zones [37–41]. This confirms the need for long-term forecasting of environmental risks and highlights the importance of further research.

Several studies highlight the importance of developing new environmentally sustainable models to predict the impact of industrial facilities, including transport infrastructure, on natural resources [37, 40–45].

Further development of spatial analysis methods, as recent studies have shown, is necessary for more accurate forecasting of air and soil pollution [1, 45, 46]. The implementation of complex models such as MSPA has already confirmed their high efficiency in environmental risk management [47–48].

Thus, current research highlights the need to develop integrated approaches that can take into account spatiotemporal changes in ecosystems and predict long-term consequences of industrial impacts.

## 2. Materials and methods / Материалы и методы

Asphalt concrete plants are a significant source of anthropogenic impact on the ecosystems of industrial zones, caused by a number of specific factors characteristic of their technological processes.

The activities of asphalt concrete plants affect the surrounding areas through the pollution of soil, atmosphere and water resources. Soil pollution can occur as a result of emissions of pollutants into the atmosphere, as well as leaks and spills of raw materials used in production.

Additionally, asphalt plants can have an indirect impact on water resources. Pollution of water bodies can occur through the leaching of pollutants into groundwater, especially if runoff is not properly controlled. This poses a risk to the quality of surface and groundwater, which in turn can affect the state of ecosystems.

Thus, the impact of asphalt concrete plants on ecosystems must be assessed comprehensively, taking into account the impact on air, soil and water resources. The study uses environmental indicators such as the level of pollutant emissions, the level of soil pollution and the state of water resources in areas adjacent to the plants.


Three asphalt plants located in industrial zones were selected as objects of analysis. These enterprises were chosen due to their different production capacities and levels of gas-cleaning efficiency, which makes them representative for testing the methodology. Although the analysis was carried out on three specific plants, the developed methodology is universal and can be applied to other asphalt concrete plants or similar industrial facilities in different regions. Satellite data, cadastral survey data and laboratory analysis of air, soil and water samples were used to assess their environmental impact. The impact assessment was based on the following key indicators:

1. Atmospheric impact: measurement of pollutant emissions including  $\text{CO}_2$ ,  $\text{NO}_x$  and particulate matter.
2. Impact on soils: assessment of disturbance of natural soil layer.
3. Impact on water resources: assessment of potential level of hydrological sustainability.

To assess and visualize the location of the plants, satellite maps with the designation of the territory boundaries were used, presented in figure 1.

Based on satellite and cadastral map data, it was found that the facilities are located in different ecological zones, which allows to assess the differences in their environmental impact depending on their location.

Table 1 shows the main technical characteristics of the asphalt plants considered in this study. These data include productivity, efficiency of gas cleaning systems, height of smoke stacks, temperature of exhaust gases and power of burners.

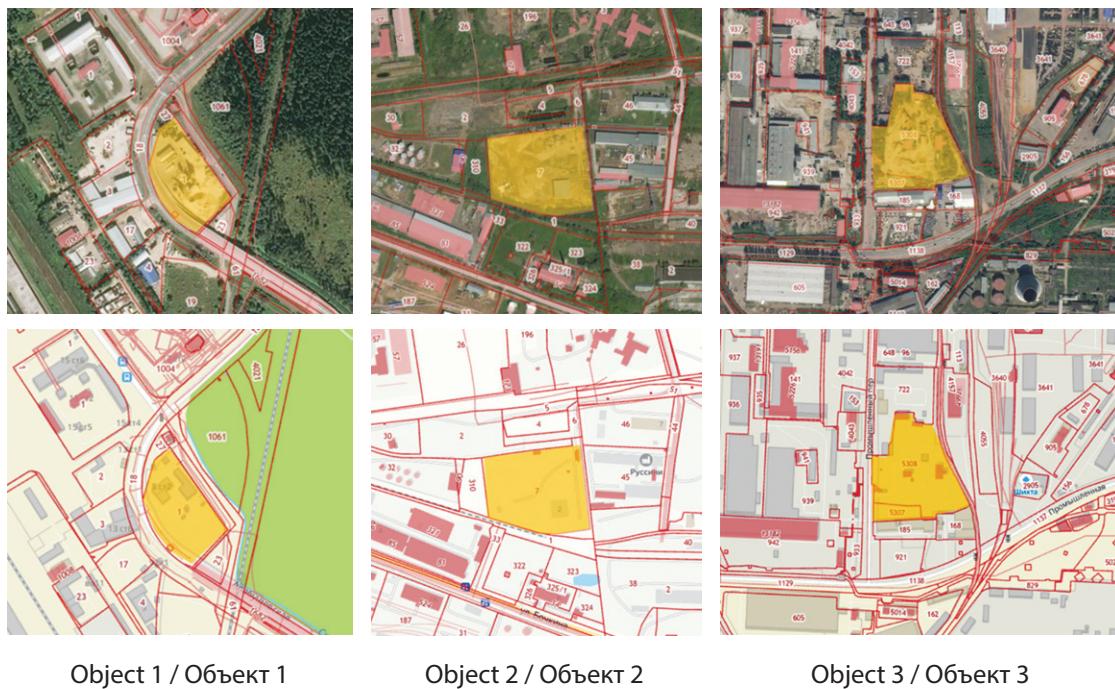

*Fig. 1. Boundaries of asphalt concrete plant territories (fragments of satellite imagery and cadastral maps)*  
Рис. 1. Границы территорий асфальтобетонных заводов  
(фрагменты спутниковых снимков и кадастровых карт)

*Table 1. Technical characteristics of asphalt concrete plants*  
Таблица 1. Технические характеристики асфальтобетонных заводов

Technical specifications	Object 1	Object 2	Object 3
Productivity, t/hour	25	50	150
Efficiency of gas cleaning devices, %	82	75	99.93
Pipe height, m	18	18.5	18.9
Exhaust gas temperature, °C	75	75	60
Burner power, MW	3.3	5.5	9.6

The data obtained make it possible to identify areas of increased environmental risk near asphalt plants, and to establish that the level of impact depends on such parameters as production capacity and the efficiency of gas cleaning systems. In the future, this will allow for the development of more precise recommendations for reducing the negative impact on the environment, applicable to each specific facility.

To comprehensively assess the impact of road construction projects on industrial zone ecosystems, a research model was developed, presented in figure 2. This model structures the process of analyzing environmental impacts and defines the key parameters necessary for developing strategies to minimize negative environmental impacts.

The model includes three main components: emissions of pollutants into the atmosphere, impact on soil resources, and impact on water resources. These components are interrelated and form the structure of the analysis, which allows for a comprehensive assessment of the impact of road construction projects on ecosystems.

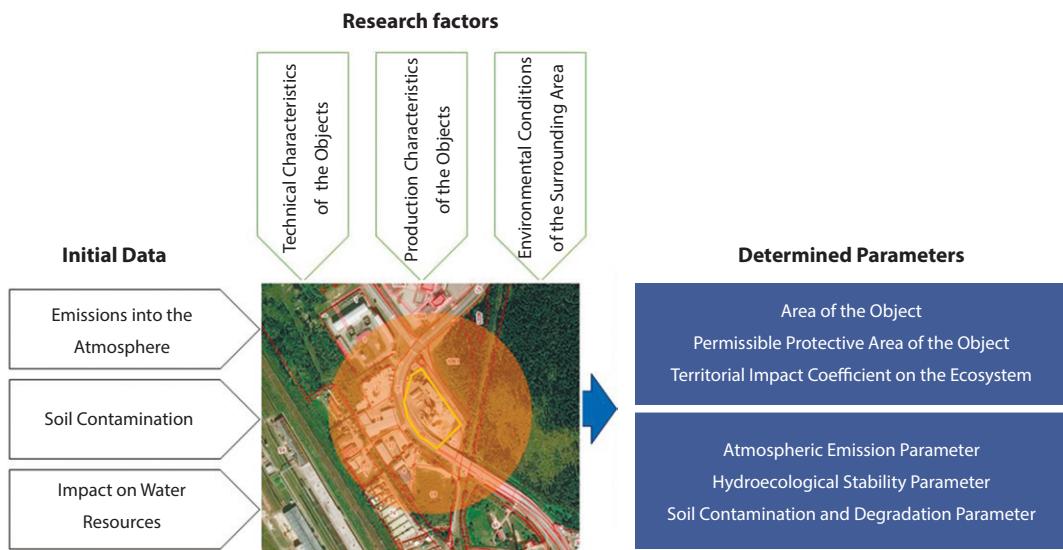


Fig. 2. Key environmental impact factors and parameters for minimizing negative impact on industrial zone ecosystems (authors' scheme)

Рис. 2. Ключевые факторы воздействия на окружающую среду и параметры, минимизирующие негативное воздействие на экосистемы промышленных зон (схема авторов)

Model study based on initial data on atmospheric emissions, soil and water conditions. The main initial data include atmospheric pollutant content ( $\text{CO}_2$ ,  $\text{NO}_x$ ,  $\text{SO}_x$ , particulate matter, hydrocarbons), soil disturbance levels and pollutant presence in water bodies.

This study identified key factors affecting the environmental conditions of industrial zones where asphalt plants operate. These factors cover a wide range of impacts, including emissions of pollutants into the atmosphere, soil pollution, and risks to water resources. A comprehensive analysis of these factors allows not only to assess the current state of the environment, but also to predict long-term environmental consequences.

1. *Impact on the atmosphere.* Atmospheric emissions are one of the most significant factors directly affecting air quality in industrial areas. During the production of asphalt, asphalt concrete plants emit significant amounts of nitrogen oxides ( $\text{NO}_x$ ), sulfur oxides ( $\text{SO}_x$ ), carbon dioxide ( $\text{CO}_2$ ), particulate matter (PM) and hydrocarbons. The concentration of these pollutants in the air may exceed maximum permissible values, which leads to deterioration of public health, as well as degradation of plant communities and biota in general.
2. *Soil pollution.* Soil pollution is another critical factor, caused by both the deposition of pollutants from the atmosphere and leaks of raw materials and production waste. The accumulation of heavy metals and organic pollutants can change the physicochemical properties of soils, such as structure, acidity and organic matter content. These changes contribute to the degradation of the soil cover and can lead to a decrease in its fertility, which in the long term negatively affects the sustainability of ecosystems.
3. *Water resources.* Water resources are also at significant risk of contamination from asphalt plants. Groundwater contamination occurs through the leaching of pollutants into aquifers and surface water bodies. The lack of runoff control and filtration systems increases the risk of pollutants entering water bodies, posing a threat to ecosystems and water supplies.

Thus, a thorough analysis of the listed factors allows for a comprehensive understanding of the impact of asphalt plants on the environment. This, in turn, creates the basis for developing environmental

risk management strategies. The use of complex analysis methods contributes to the accuracy of forecasting and allows for the formulation of well-founded recommendations for reducing the negative impact on industrial zone ecosystems.

In order to comprehensively assess the impact of road construction projects on industrial zone ecosystems, an original methodology based on a parametric criteria approach was developed and applied. This methodology allows for the integration of a wide range of environmental and technological parameters, which provides a more in-depth and objective analysis of the impact on the environment. The use of this approach helps to identify key risk factors, develop strategies to minimize negative impacts, and formulate well-founded recommendations to ensure sustainable development of industrial areas.

The proposed methodology includes several stages, starting with careful data collection and ending with the development of practical recommendations for environmental risk management. Each stage is included sequentially and interrelatedly, which allows for a systematic and holistic approach to assessing and managing the environmental impacts of road construction activities.

To assess the impact of asphalt concrete plants on industrial zone ecosystems, a multiparametric criteria method was developed, which includes the sequential implementation of five main stages, as shown in figure 3. This methodology provides a comprehensive analysis of environmental risks and allows for the formation of effective management strategies.

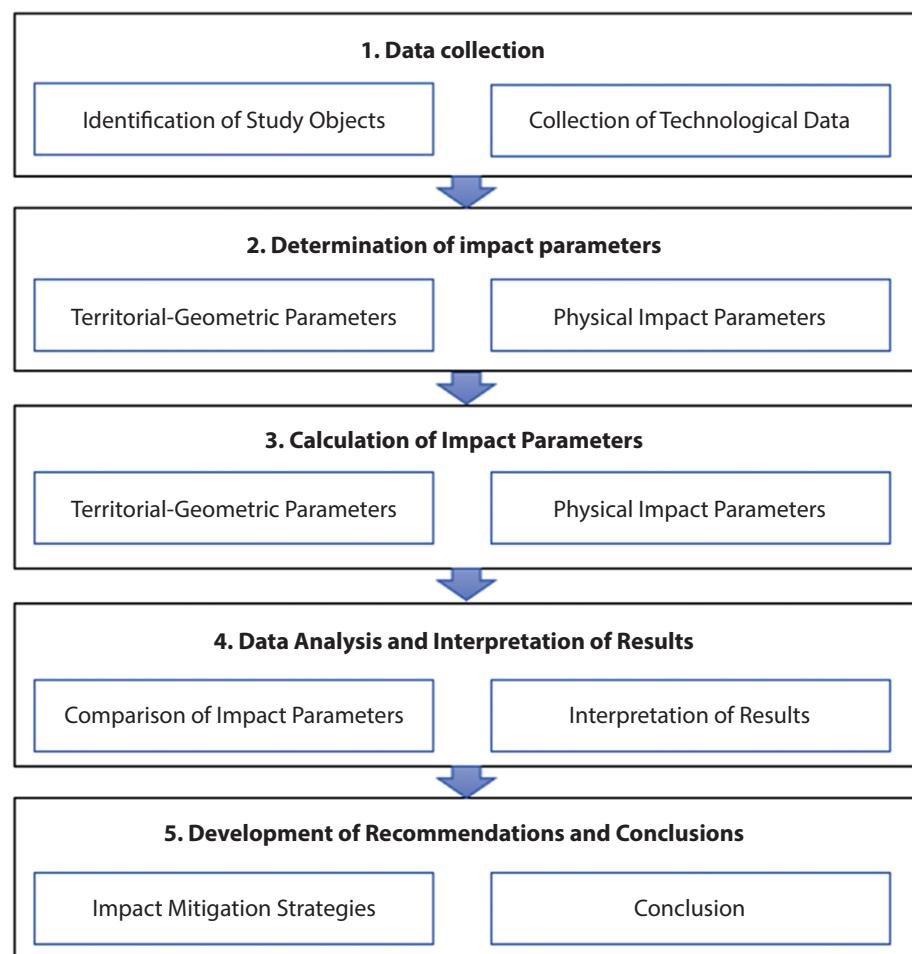


Fig. 3. Criteria-based method assessing the environmental risks (scheme compiled by the authors)  
Рис. 3. Критериальный метод оценки экологических рисков (схема составлена авторами)

*Stage 1.* Data collection. The first stage involves collecting the necessary data on the technological parameters of the asphalt concrete plants, their production characteristics, and the physical and environmental conditions of the environment. This includes data on pollutant emissions, soil characteristics, and water resources. Information from the cadastral plan, environmental monitoring results, and satellite monitoring and geographic information systems (GIS) data are used.

*Stage 2.* Identification of impact factors and parameters. The second stage involves identifying key environmental factors and parameters that will be used to assess the environmental impact of the facilities. Territorial-geometric characteristics and physical impact parameters were selected as the main parameters. Each of these parameters is described in detail and classified by the degree of impact (high, medium, low), which allows for an assessment of the impact on ecosystems.

*Stage 3.* Calculation of impact parameters. The third stage involves calculating the quantitative values of each of the defined parameters using the developed formulas. For example, to calculate the atmospheric emission parameter, the total concentration of pollutant indicators is used, which is compared with the maximum permissible concentrations (MPC). Hydroecological stability and soil degradation parameters are also calculated, which allows us to determine the degree of impact on water and soil resources.

*Stage 4.* Data analysis and interpretation of results. The fourth stage involves analyzing the data obtained, including calculating and assessing the values of the impact parameters. Integration of the analysis results allows identifying the greatest environmental risks and defining critical areas requiring additional attention. Also at this stage, areas requiring special attention and possible intervention to minimize environmental damage are identified.

*Stage 5.* Development of recommendations and conclusions. The final stage is the development of recommendations for managing environmental risks and minimizing the impact of road construction projects on the environment. During the analysis, specific measures are formulated to reduce emissions, improve air and water purification methods, and optimize the use of natural resources. As a result, conditions are created for the sustainable development of industrial zones taking into account environmental safety.

When assessing the impact of asphalt concrete plants on industrial zone ecosystems, the key stage is to determine the parameters and criteria that will be used for quantitative analysis and modeling. The correct choice of these parameters and their interrelations allows not only to obtain accurate assessments of the environmental impact, but also to identify the main sources of environmental risk that require management decisions.

The proposed parametric criteria method is based on the selection of key parameters reflecting the territorial and geometric characteristics of objects, their physical impact on the environment, and

*Table 2. Sets of key parameters for assessing the environmental risks*  
*Таблица 2. Ключевые параметры для оценки экологических рисков*

Parameter group	Parameters
Territorial-geometric group	Object area
	Permissible protective area of the object
	Coefficient of territorial impact on the environment
Physical impact group	Atmospheric emission parameter
	Hydroecological stability parameter
	Soil contamination and degradation parameter

the sustainability of ecosystems to anthropogenic impact. This approach takes into account the multiplicity of factors and interactions, which makes it possible to detail forecasts and develop effective strategies for managing environmental risks.

The proposed approach is based on dividing the parameters into two groups: territorial-geometric parameters and physical impact parameters. Both sets of parameters allow to assess the impact on various components of ecosystems and take into account the spatial and temporal aspects of the impact (table 2).

Table 3 presents the key parameters of the parametric estimation method used in the study.

*Table 3. Criteria of the multiparametric evaluation method*  
 Таблица 3. Параметры, используемые при критериальном методе оценки

Parameter	Conventional designation	Unit of measurement	Environmental impact criteria			
			High	Medium	Low	
<b>Territorial-geometric group</b>						
1	Object area	$S_{ob}$	thousand m <sup>2</sup>	$\geq 100$	10–100	< 10
2	Permissible protective area of the object	$S_{pr}$	thousand m <sup>2</sup>	$\geq 50 S_{ob}$	10–50 $S_{ob}$	< 10 $S_{ob}$
3	Coefficient of territorial impact on the environment	$K_{ter}$	–	$\geq 100$	50–100	< 10
<b>Physical impact group</b>						
4	Atmospheric emission parameter	AEP	–	$\geq 5.0$	2.5–5.0	< 2.5
5	Hydroecological sustainability parameter	HSP	–	$\leq 0.6$	0.6–0.8	> 0.8
6	Soil contamination and degradation parameter	SCP	–	$> 0.7$	0.3–0.7	$\leq 0.3$

These parameters allow to cover a wide range of environmental aspects related to the activities of road construction facilities (RCF) and provide an opportunity to more accurately assess the impact on the ecosystems of industrial zones. Such classification allows comprehensively assessing the impact of road construction facilities on various components of ecosystems and taking into account the spatial and temporal aspects of impact.

The study of the parameters and criteria determining the impact of asphalt concrete plants on ecosystems requires the use of an integrated approach that allows classifying and quantifying the environmental impacts associated with the operation and implementation of infrastructure projects. The application of the developed methodology makes it possible to comprehensively assess the anthropogenic impact on natural systems, including territorial-geometric changes, technological consequences, as well as physical and resource impacts. Each of these aspects is analyzed using specially developed quantitative indicators, which allows for objective and accurate results.

The use of these parameters and criteria helps to formulate well-founded strategic decisions aimed at minimizing environmental damage and optimizing the use of natural resources. This approach not only increases the level of environmental safety and reduces the risks of negative consequences for the environment, but also promotes the integration of sustainable development principles into the planning, design and operation of asphalt concrete plants.

1. *Object area.* The area of the object is determined by the cadastral boundaries of the territory of the object on which the assessment of the activities of the objects is carried out. The inclusion of this parameter allows taking into account the spatial aspects of the influence.
2. *Permissible protective area of the object.* The assessment of the area that should be protected within the sanitary and buffer zones allows for the consideration of high levels of anthropogenic impact and critical areas with increased risks to ecosystems.
3. *Coefficient of territorial impact on the environment.* It is a quantitative assessment that reflects the relationship between the area intended to minimize the impact on the natural environment and the area of the facility.
4. *Atmospheric emission parameter.* The parameter is a comprehensive assessment of the degree of impact of emissions on the territory of RCF for five indicator substances ( $\text{CO}_2$ ;  $\text{NO}_x$ ;  $\text{SO}_x$ ;  $\text{PM}_{10}$ ; hydrocarbons). This parameter is calculated using the formula:

$$AEP = \int_{i=5}^5 \left( \frac{C_i}{MPC_{M.P.}^i} \right), \quad (1)$$

where  $C_i$  – average concentration of the  $i$ -th pollutant;

$MPC_{M.P.}$  – maximum one-time maximum permissible concentration for the  $i$ -th pollutant in the work area.

5. *Hydroecological sustainability parameter.* Numerically reflects the level of ecosystem resistance to pollution and impact on surface soil layers. The formula used for calculation is:

$$HSP = \frac{1}{1 + 1.2(10K \cdot A)}, \quad (2)$$

where  $K$  is the soil filtration coefficient, which is measured in m/day and may vary depending on the type of soil;

$A$  is the area of the territory under the influence of road construction facilities, measured in square kilometers.

6. *Soil contamination and degradation parameter.* The formula takes into account the ratio of the area of the disturbed layer to the total area of the site:

$$SCP = \frac{ADS}{S_{ob}} \cdot DSL, \quad (3)$$

where  $SCP$  – soil contamination and degradation parameter;

$ADS$  – area of disturbed soil layer;

$S_{ob}$  – object area;

$DSL$  – depth of soil and vegetation layer.

These indices provide a complete picture of the extent of soil and air pollution, as well as the potential for ecosystem restoration.

### 3. Results and discussion / Результаты и обсуждение

This section presents the results of the study obtained in the course of applying the parametric methodology developed for assessing the environmental impact of road construction facilities on industrial zone ecosystems. All results are presented in strict accordance with the stages set out in the methodology. This approach allowed not only to systematize the analysis process, but also to ensure a logical and consistent interpretation of the data, which is especially important for a comprehensive analysis of the impact on the environment.

#### Step 1. Data Collection

At the first stage, the necessary data on the technological parameters and characteristics of the asphalt concrete plants were collected. Table 4 presents the main characteristics of the three objects that were analyzed.

#### Step 2. Determination of factors and parameters of influence

At this stage, key factors and parameters of environmental impact were identified, including the area of the facility, the permissible protective area, the territorial impact coefficient and the parameters of physical impact, including the atmospheric emission parameter and the parameters of hydroecological stability and soil contamination.

#### Step 3. Calculation of impact parameters

At this stage, a quantitative calculation of the parameters of certain degrees of impact of road construction facilities on the environment was carried out. The calculation method and formulas used are described in detail in the previous sections. The main attention was paid to a comprehensive assessment of

key parameters such as atmospheric emissions, hydroecological stability and the degree of soil degradation. The calculation results are presented in table 5.

*Table 4. Initial data for calculating impact parameters for environment*  
 Таблица 4. Исходные данные для расчета параметров воздействия на окружающую среду

Parameter	Object 1	Object 2	Object 3
Object area, thousand m <sup>2</sup>	147	265	231
Radius of protection zone, m	500	500	500
CO <sub>2</sub> concentration, mg/m <sup>3</sup>	15	10	8
NO <sub>x</sub> concentration, mg/m <sup>3</sup>	0.15	0.12	0.10
SO <sub>x</sub> concentration, mg/m <sup>3</sup>	0.10	0.08	0.06
PM <sub>10</sub> concentration, mg/m <sup>3</sup>	0.05	0.04	0.03
Hydrocarbon concentration, mg/m <sup>3</sup>	0.03	0.02	0.015
Soil type	Dusty sand	Clay	Sandy loam
Filtration coefficient, m/day	14	10	12
Area of disturbed layer, thousand m <sup>2</sup>	13.25	12.50	11.80
Depth of soil and vegetation layer, m	0.2	0.2	0.2

*Table 5. Results of determining the evaluation parameters for asphalt concrete plants*  
 Таблица 5. Значения параметров оценки асфальтобетонных заводов

Parameter	Object 1	Object 2	Object 3
Object area, thousand m <sup>2</sup>	14.7	26.5	23.1
Permissible protective area of the object, thousand m <sup>2</sup>	785	785	785
Coefficient of territorial impact on the environment	51.6	29.6	33.9
Atmospheric emission parameter	2.8	1.3	0.8
Hydroecological sustainability parameter	0.76	0.96	0.96
Soil contamination and degradation parameter	0.18	0.14	0.17

#### *Step 4. Data analysis and interpretation of results*

At the fourth stage, a comprehensive analysis of the obtained data and their interpretation was carried out in order to identify the degree of impact of the asphalt concrete plant on the environment. Using the calculation results, a comparative analysis of the calculated parameters with the limit values was carried out, which made it possible to determine the levels of environmental impact on the ecosystems of industrial zones.

The analysis included key parameters such as the territorial impact coefficient, atmospheric emission parameter, hydroecological stability and soil degradation. Each of these parameters was assessed according to the level of impact on ecosystems. Table 6 presents the final assessment for each of the parameters.

*Table 6. Analysis of parametric assessment by the level of negative impact for the objects under consideration*  
 Таблица 6. Оценка параметров по уровню негативного воздействия для рассматриваемых объектов

Parameter	Object 1	Object 2	Object 3
Object area, thousand m <sup>2</sup>	Low	Low	Low
Permissible protective area of the object, thousand m <sup>2</sup>	High	Medium	Medium
Coefficient of territorial impact on the environment	Medium	Low	Low
Atmospheric emission parameter	Medium	Low	Low
Hydroecological sustainability parameter	Medium	Low	Low
Soil contamination and degradation parameter	Low	Low	Low

Based on the analysis of the environmental impact of the three asphalt plants, key differences and common trends were identified, which allow us to formulate the following conclusions:

1. Object 1 demonstrates a higher level of impact for a number of parameters, such as the permissible protective area, the territorial impact coefficient and the atmospheric emission parameter. This indicates the need for enhanced emission control and additional measures to reduce the negative impact on the environment.
2. Objects 2 and 3 show a lower level of impact, which indicates a more balanced interaction with the ecosystem. These sites are characterized by low values for most key parameters, which may indicate more efficient use of the territory and lower emissions.

Nevertheless, despite the low indicators, it is necessary to maintain a high level of environmental safety and conduct regular monitoring to prevent possible deterioration of the environmental situation.

#### *Step 5. Developing recommendations and conclusions*

Based on the analysis of the impact of road construction projects on industrial zone ecosystems, key environmental risks were identified and recommendations were proposed to minimize the negative impact on the environment. The main focus was on assessing the effectiveness of current environmental risk management strategies, as well as developing specific measures that can be implemented to improve the environmental situation at each facility. The study identified several critical aspects that require immediate corrective action, such as monitoring pollutant emissions, remediating soils, improving water management, and optimizing land use.

At the first stage of developing recommendations, the technological and organizational capabilities for each industrial zone were analyzed, including the specifics of their location, the capacity of asphalt plants, and the degree of impact on the environment. This made it possible to identify key risk areas and outline priority measures that can be implemented for each facility, taking into account its specifics.

One of the main areas is the modernization of treatment plants to reduce emissions into the atmosphere and minimize soil degradation. It is also important to introduce systems for continuous monitoring of the state of water resources, especially in areas with high levels of wastewater pollution. Effective use of buffer zones and recycling of industrial waste can also reduce the load on ecosystems, increasing their sustainability.

In addition, it is recommended to review approaches to the use of land in the industrial zone in order to optimize their distribution and reduce anthropogenic impact on the environment. This includes both improved zoning and the implementation of long-term plans for the reclamation of disturbed lands.

Moving on to specific recommendations for each of the objects under consideration, they are structured in accordance with the identified environmental risks and technological capabilities for their elimination. Table 7 presents key measures that can be implemented to reduce the negative impact on the environment and increase the sustainability of industrial zones.

*Table 7. Recommendations for the objects under consideration*

Таблица 7. Рекомендации для рассматриваемых объектов

Recommendations	Object 1	Object 2	Object 3
Equipment optimization	Modernization of gas cleaning plants	Upgrading to meet standards	Audit of technologies and implementation of alternative energy sources
Water resources monitoring	Implementation of water monitoring and purification systems	Continuation of monitoring programs	Expanding monitoring programs and control of effluents
Soil reclamation	Land reclamation and restoration of fertility	Monitoring and cleaning up contaminated soils	Minimizing soil contamination and buffer zones
Land use and zoning	Zoning and revision of land use	Developing long-term strategies	Developing long-term strategies taking into account environmental risks

#### 4. Conclusions / Заключение

The application of the multiparametric methodology allowed for a comprehensive assessment of the environmental impact of road construction projects and the identification of key environmental risks requiring immediate attention. This methodology has proven its effectiveness in analyzing various impact aspects, such as air emissions, soil degradation, and impact on water resources:

1. Confirmation of the significance of the developed methodology. The use of a multiparameter methodology for assessing the impact of road construction projects on ecosystems has proven to be highly effective. The use of this technique allowed for an accurate and objective integration of many factors, which made it possible to conduct a comprehensive assessment of the state of the environment and develop specific measures to minimize the negative impact.
2. Identification of critical parameters. The study confirmed that the main impact of asphalt concrete plants is manifested in such parameters as atmospheric emissions ( $\text{CO}_2$ ,  $\text{NO}_x$ ,  $\text{SO}_x$ ) and soil degradation. This requires taking stricter measures to reduce emissions and improve the quality of the soil cover.
3. Recommendations for reducing the negative impact. As a result of the analysis, specific recommendations were developed to minimize environmental damage. These measures are aimed at modernizing equipment to improve emission purification, introducing water and soil resource monitoring systems, and improving the level of environmental safety.
4. Continuous monitoring and adjustment of standards. The data obtained confirm the need for regular monitoring of the environmental situation and adjustment of existing environmental standards for each facility. Constant monitoring of changes in conditions and factors of influence will allow us to adapt environmental protection measures and minimize environmental risks.

Thus, the implementation of recommendations developed on the basis of this methodology creates the basis for effective management of environmental risks at all stages of operation of road construction facilities.

Importantly, the proposed methodology represents a new approach to environmental impact assessment, as it complements the existing regulatory framework and provides an integrated multiparametric tool for identifying critical environmental risks. Its universality makes it suitable for application not only to asphalt plants but also to other industrial facilities with similar ecological profiles, and its use can improve the quality of decision-making in regional programs of ecological monitoring and sustainable industrial development.



**Author contribution.** All authors contributed equally to preparing the publication.

**Вклад авторов.** Авторы внесли равный вклад в подготовку публикации.

**Conflict of interest.** Roman S. Fediuk has been a member of the editorial board of the journal "Architecture, Construction, Transport" since 2023. He did not participate in the decision-making process regarding the publication of this article. The manuscript underwent the standard peer-review procedure in accordance with the journal's editorial policy. The authors declare no other conflicts of interest.

**Конфликт интересов.** Федюк Р. С. является членом редакционной коллегии журнала «Архитектура, строительство, транспорт» с 2023 года. Он не принимал участия в принятии решения о публикации статьи, рукопись прошла стандартную процедуру рецензирования, предусмотренную редакционной политикой журнала. Авторам неизвестно о других конфликтах интересов.

#### References

1. Xu X., Wang S., Rong W. Construction of ecological network in Suzhou based on the PLUS and MSPA models. *Ecological Indicators*. 2023;154:110740. <https://doi.org/10.1016/j.ecolind.2023.110740>
2. Abdullah M. A. H., Rashid R. S. M., Amran M., Hejazii F., Azreen N. M., Fediuk R., et al. Recent trends in advanced radiation shielding concrete for construction of facilities: Materials and properties. *Polymers (Basel)*. 2022;14:2830. <https://doi.org/10.3390/polym14142830>

3. Han J., Zhou H., Lowik S., de Weerd-Nederhof P. Enhancing the understanding of ecosystems under innovation management context: Aggregating conceptual boundaries of ecosystems. *Industrial Marketing Management*. 2022;106:112–138. <https://doi.org/10.1016/j.indmarman.2022.08.008>
4. McPhearson T., Cook E. M., Berbés-Blázquez M., Cheng C., Grimm N. B., Andersson E., et al. A social-ecological-technological systems framework for urban ecosystem services. *One Earth*. 2022;5(5):505–518. <https://doi.org/10.1016/j.oneear.2022.04.007>
5. Boom Y. J., Xuan D. L., Enfrin M., Swaney M., Masood H., Pramanik B. K., et al. Engineering properties, microplastics and emissions assessment of recycled plastic modified asphalt mixtures. *Science of the Total Environment*. 2023;893:164869. <https://doi.org/10.1016/j.scitotenv.2023.164869>
6. Quevedo J. M. D., Uchiyama Y., Kohsaka R. A blue carbon ecosystems qualitative assessment applying the DPSIR framework: Local perspective of global benefits and contributions. *Marine Policy*. 2021;128:104462. <https://doi.org/10.1016/j.marpol.2021.104462>
7. Nakhjiri A., Kakroodi A. A. Air pollution in industrial clusters: A comprehensive analysis and prediction using multi-source data. *Ecological Informatics*. 2024;80:102504. <https://doi.org/10.1016/j.ecoinf.2024.102504>
8. Bantserova O. L., Sorokina V. O. The problem of preservation of the existing architectural and historical-cultural landscapes of resort cities of the South Coast of Crimea. *Construction Materials and Products*. 2023;6(1):18–28. (In Russ.) <https://doi.org/10.58224/2618-7183-2023-6-1-18-28>
9. Fediuk R., Timokhin R., Mochalov A., Otsokov K., Lashina I. Performance properties of high-density impermeable cementitious paste. *Journal of Materials in Civil Engineering*. 2019;31(4). [https://doi.org/10.1061/\(ASCE\)MT.1943-5533.0002633](https://doi.org/10.1061/(ASCE)MT.1943-5533.0002633)
10. Abbas F. A., Alhamdo M. H. Thermal performance of asphalt solar collector by improving tube and slab characteristics. *International Journal of Thermofluids*. 2023;17:100293. <https://doi.org/10.1016/j.ijft.2023.100293>
11. Pandey V. C. Fly ash deposits – a potential sink for carbon sequestration. In: *Phytomanagement of Fly Ash*. Elsevier; 2020. P. 235–255. <https://doi.org/10.1016/B978-0-12-818544-5.00008-0>
12. Fediuk R., Yushin A. Composite binders for concrete with reduced permeability. *IOP Conference Series: Materials Science and Engineering*. 2016;116:012021. <https://doi.org/10.1088/1757-899X/116/1/012021>
13. Zhang J., Hu R., Cheng X., Christos V., Philbin S. P., Zhao R., et al. Assessing the landscape ecological risk of road construction: The case of the Phnom Penh-Sihanoukville Expressway in Cambodia. *Ecological Indicators*. 2023;154:110582. <https://doi.org/10.1016/j.ecolind.2023.110582>
14. Sijing X., Gang L., Biao M. Vulnerability analysis of land ecosystem considering ecological cost and value: A complex network approach. *Ecological Indicators*. 2023;147:109941. <https://doi.org/10.1016/j.ecolind.2023.109941>
15. Anjum M., Siddique N., Younis H., Faiz Y., Shafique M. A., Mahnoor A., et al. Heavy metals and radionuclides in Islamabad's industrial area: A comprehensive analysis of soil and water pollution, source apportionment and health effects using statistical and geospatial tools. *Journal of Trace Elements and Minerals*. 2024;8:100127. <https://doi.org/10.1016/j.jtemin.2024.100127>
16. Hu J., Zhang J., Li Y. Exploring the spatial and temporal driving mechanisms of landscape patterns on habitat quality in a city undergoing rapid urbanization based on GTWR and MGWR: The case of Nanjing, China. *Ecological Indicators*. 2022;143:109333. <https://doi.org/10.1016/j.ecolind.2022.109333>
17. Wang S., Yao W., Ma Y., Shang E., Zhang S., Chen F., et al. Optimizing natural boundary definition and functional zoning in protected areas: An integrated framework encompassing species, landscapes and ecosystems. *Global Ecology and Conservation*. 2024;49:e02781. <https://doi.org/10.1016/j.gecco.2023.e02781>
18. Liu H., Zhang M., Du J., Zhou Y., Yi Y. Exploring zonation strategy in land management of urban agglomeration. *Ecological Indicators*. 2022;145:109664. <https://doi.org/10.1016/j.ecolind.2022.109664>
19. Khaniabadi Y. O., Goudarzi G., Daryanoosh S. M., Borgini A., Tittarelli A., De Marco A. Exposure to PM<sub>10</sub>, NO<sub>2</sub>, and O<sub>3</sub> and impacts on human health. *Environmental Science and Pollution Research*. 2017;24:2781–2789. <https://doi.org/10.1007/s11356-016-8038-6>
20. Cerneau J., Junqua G., Gonzalez C., Lopez-Ferber M., Mat N. Industrial ecology and the building of territorial knowledge: DEPART, a French research action program implemented in harbor territories. *Procedia – Social and Behavioral Sciences*. 2012;40:622–630. <https://doi.org/10.1016/j.sbspro.2012.03.240>
21. Zhao H., Xu X., Tang J., Wang Z., Miao C. Understanding the key factors and future trends of ecosystem service value to support the decision management in the cluster cities around the Yellow River floodplain area. *Ecological Indicators*. 2023;154:110544. <https://doi.org/10.1016/j.ecolind.2023.110544>

22. Zhao J., Yu Q., Xu C., Ma J., Liu W., Sun W., et al. Integrated approach for ecological restoration and ecological spatial network optimization with multiple ecosystem functions in mining areas. *Ecological Indicators*. 2023;156:111141. <https://doi.org/10.1016/j.ecolind.2023.111141>
23. Zhang P., Shi J. Slow recovery of natural ecosystems as an important factor restricting regional coordinated development. *Ecological Indicators*. 2024;158:111435. <https://doi.org/10.1016/j.ecolind.2023.111435>
24. Petrov A.M., Magomedov R.M., Savina S.V. Ecological safety of construction in the concept of sustainable development. *Construction Materials and Products*. 2023;6(1):5–17. (In Russ.) <https://doi.org/10.58224/2618-7183-2023-6-1-5-17>
25. Wu X., Liu H., Liu W. Exploring the spatiotemporal evolution dynamic and influencing factor of green ecology transition for megacities: A case study of Chengdu, China. *Ecological Indicators*. 2024;158:111285. <https://doi.org/10.1016/j.ecolind.2023.111285>
26. Zhang D., Wu L., Huang S., Zhang Z., Ahmad F., Zhang G., et al. Ecology and environment of the Belt and Road under global climate change: A systematic review of spatial patterns, cost efficiency, and ecological footprints. *Ecological Indicators*. 2021;131:108237. <https://doi.org/10.1016/j.ecolind.2021.108237>
27. Ganzen E. V. Research of the response surface of the integral potential of capital repairs and reconstruction of public buildings in the fuzzy inference system. *Construction Materials and Products*. 2022;5(2):35–42. (In Russ.) <https://doi.org/10.58224/2618-7183-2022-5-2-35-42>
28. Guo J., Rong Y., Zhu J., Yan Y., Du J., Zheng L., et al. Industrial development zoning with dual objectives of spatial development suitability and ecosystem service value: A case study in Xiaonanhai Hydropower Station basin. *Ecological Indicators*. 2024;158:111522. <https://doi.org/10.1016/j.ecolind.2023.111522>
29. Fuentes Barrera G. A., Gabarrell i Durany X., Rieradevall Pons J., Guerrero Erazo J. G. Trends in global research on industrial parks: A bibliometric analysis from 1996–2019. *Heliyon*. 2021;7(8):e07778. <https://doi.org/10.1016/j.heliyon.2021.e07778>
30. Gokul P. R., Mathew A., Bhosale A., Nair A. T. Spatio-temporal air quality analysis and PM2.5 prediction over Hyderabad City, India using artificial intelligence techniques. *Ecological Informatics*. 2023;76:102067. <https://doi.org/10.1016/j.ecoinf.2023.102067>
31. Xue B., Xiao X., Li J. Identification method and empirical study of urban industrial spatial relationship based on POI big data: A case of Shenyang City, China. *Geography and Sustainability*. 2020;1(2):152–162. <https://doi.org/10.1016/j.geosus.2020.06.003>
32. Yin H., Guo B., Huang X., Huo Z., Zhao L. Scenario-based analysis for industrial project planning in the context of carbon peaking: Case study city, China. *Clean Energy Systems*. 2023;10:100134. <https://doi.org/10.1016/j.cesys.2023.100134>
33. David L. M., Nair P. R. Tropospheric column O<sub>3</sub> and NO<sub>2</sub> over the Indian region observed by Ozone Monitoring Instrument (OMI): Seasonal changes and long-term trends. *Atmospheric Environment*. 2013;65:25–39. <https://doi.org/10.1016/j.atmosenv.2012.09.033>
34. Martinez-Alier J. Mapping ecological distribution conflicts: The EJAtlas. *The Extractive Industries and Society*. 2021;8(4):100883. <https://doi.org/10.1016/j.exis.2021.02.003>
35. Sovacool B. K., Iskandarova M., Hall J. Industrializing theories: A thematic analysis of conceptual frameworks and typologies for industrial sociotechnical change in a low-carbon future. *Energy Research and Social Science*. 2023;97:102954. <https://doi.org/10.1016/j.erss.2023.102954>
36. Salat S., Bourdic L. Power laws for energy efficient and resilient cities. *Procedia Engineering*. 2011;21:1193–1198. <https://doi.org/10.1016/j.proeng.2011.11.2130>
37. Pai J.-T., Hu D., Liao W.-W. Research on eco-efficiency of industrial parks in Taiwan. *Energy Procedia*. 2018;152:691–697. <https://doi.org/10.1016/j.egypro.2018.09.232>
38. Yang S. Evaluation of urban ecological security model based on GIS sensing and MCR model. *Measurement: Sensors*. 2024;33:101206. <https://doi.org/10.1016/j.measen.2024.101206>
39. Nong K., Lin J., Sun D. Spatiotemporal patterns, effects, and the interactive driving mechanisms of urban sustainability based on the eco-efficiency framework: Evidence from Chinese prefecture-level cities. *Environmental Sustainability Indicators*. 2024;23:100391. <https://doi.org/10.1016/j.indic.2024.100391>
40. Sheina S. G., Khamanova A. A. Technique for the Russian Federation regional territories assessment used to create industrial parks network. *Procedia Engineering*. 2016;150:1960–1965. <https://doi.org/10.1016/j.proeng.2016.07.198>

41. Schlüter L., Mortensen L., Gjerding A.N., Kørnøv L. Can we replicate eco-industrial parks? Recommendations based on a process model of EIP evolution. *Journal of Cleaner Production*. 2023;429:139499. <https://doi.org/10.1016/j.jclepro.2023.139499>
42. Luo Q., Bao Y., Wang Z., Chen X., Wei W., Fang Z. Vulnerability assessment of urban remnant mountain ecosystems based on ecological sensitivity and ecosystem services. *Ecological Indicators*. 2023;151:110314. <https://doi.org/10.1016/j.ecolind.2023.110314>
43. Omelchenko E., Trushkova E., Sitnik S., Bogatina A. Study of the effectiveness of innovative air purification systems used in the design of road construction enterprises. *Transportation Research Procedia*. 2022;61:594–599. <https://doi.org/10.1016/j.trpro.2022.01.096>
44. Zhao Y., Li S., Li T., Chen X., Chen J., Wang K. Integrating improved ecosystem status assessment and ecosystem management urgency to identify important zones for ecological protection and restoration. *Ecological Indicators*. 2024;162:112033. <https://doi.org/10.1016/j.ecolind.2024.112033>
45. Tolstykh T., Gamidullaeva L., Shmeleva N., Gromov S., Ermolenko A. Megapolis as a symbiosis of socio-economic ecosystems: The role of collaboration. *Journal of Open Innovation: Technology, Market, and Complexity*. 2022;8(3):126. <https://doi.org/10.3390/joitmc8030126>
46. Wang L., Zheng H., Chen Y., Ouyang Z., Hu X. Systematic review of ecosystem services flow measurement: Main concepts, methods, applications and future directions. *Ecosystem Services*. 2022;58:101479. <https://doi.org/10.1016/j.ecoser.2022.101479>
47. Mugahed Amran Y. H., El-Zeadani M., Huei Lee Y., Yong Lee Y., Murali G., Fediuk R. Design innovation, efficiency and applications of structural insulated panels: A review. *Structures*. 2020;27:1358–1379. <https://doi.org/10.1016/j.istruc.2020.07.044>
48. Masoud A. A. Spatio-temporal patterns and trends of the air pollution integrating MERRA-2 and in situ air quality data over Egypt (2013–2021). *Air Quality, Atmosphere & Health*. 2023;16:1543–1570. <https://doi.org/10.1007/s11869-023-01357-6>

#### Список литературы

1. Xu X., Wang S., Rong W. Construction of ecological network in Suzhou based on the PLUS and MSPA models. *Ecological Indicators*. 2023;154:110740. <https://doi.org/10.1016/j.ecolind.2023.110740>
2. Abdullah M. A. H., Rashid R. S. M., Amran M., Hejazii F., Azreen N. M., Fediuk R., et al. Recent trends in advanced radiation shielding concrete for construction of facilities: Materials and properties. *Polymers (Basel)*. 2022;14:2830. <https://doi.org/10.3390/polym14142830>
3. Han J., Zhou H., Lowik S., de Weerd-Nederhof P. Enhancing the understanding of ecosystems under innovation management context: Aggregating conceptual boundaries of ecosystems. *Industrial Marketing Management*. 2022;106:112–138. <https://doi.org/10.1016/j.indmarman.2022.08.008>
4. McPhearson T., Cook E. M., Berbés-Blázquez M., Cheng C., Grimm N. B., Andersson E., et al. A social-ecological-technological systems framework for urban ecosystem services. *One Earth*. 2022;5(5):505–518. <https://doi.org/10.1016/j.oneear.2022.04.007>
5. Boom Y.J., Xuan D. L., Enfrin M., Swaney M., Masood H., Pramanik B. K., et al. Engineering properties, microplastics and emissions assessment of recycled plastic modified asphalt mixtures. *Science of the Total Environment*. 2023;893:164869. <https://doi.org/10.1016/j.scitotenv.2023.164869>
6. Quevedo J. M. D., Uchiyama Y., Kohsaka R. A blue carbon ecosystems qualitative assessment applying the DPSIR framework: Local perspective of global benefits and contributions. *Marine Policy*. 2021;128:104462. <https://doi.org/10.1016/j.marpol.2021.104462>
7. Nakhjiri A., Kakroodi A. A. Air pollution in industrial clusters: A comprehensive analysis and prediction using multi-source data. *Ecological Informatics*. 2024;80:102504. <https://doi.org/10.1016/j.ecoinf.2024.102504>
8. Банцерова О. Л., Сорокина В. О. Проблема сохранения существующего архитектурного и историко-культурного ландшафта курортных городов южного берега Крыма. *Строительные материалы и изделия*. 2023;6(1):18–28. <https://doi.org/10.58224/2618-7183-2023-6-1-18-28>
9. Fediuk R., Timokhin R., Mochalov A., Otsokov K., Lashinal I. Performance properties of high-density impermeable cementitious paste. *Journal of Materials in Civil Engineering*. 2019;31(4). [https://doi.org/10.1061/\(ASCE\)MT.1943-5533.0002633](https://doi.org/10.1061/(ASCE)MT.1943-5533.0002633)
10. Abbas F. A., Alhamdo M. H. Thermal performance of asphalt solar collector by improving tube and slab characteristics. *International Journal of Thermofluids*. 2023;17:100293. <https://doi.org/10.1016/j.ijft.2023.100293>

11. Pandey V. C. Fly ash deposits – a potential sink for carbon sequestration. In: *Phytomanagement of Fly Ash*. Elsevier; 2020. P. 235–255. <https://doi.org/10.1016/B978-0-12-818544-5.00008-0>
12. Fediuk R., Yushin A. Composite binders for concrete with reduced permeability. *IOP Conference Series: Materials Science and Engineering*. 2016;116:012021. <https://doi.org/10.1088/1757-899X/116/1/012021>
13. Zhang J., Hu R., Cheng X., Christos V., Philbin S. P., Zhao R., et al. Assessing the landscape ecological risk of road construction: The case of the Phnom Penh-Sihanoukville Expressway in Cambodia. *Ecological Indicators*. 2023;154:110582. <https://doi.org/10.1016/j.ecolind.2023.110582>
14. Sijing X., Gang L., Biao M. Vulnerability analysis of land ecosystem considering ecological cost and value: A complex network approach. *Ecological Indicators*. 2023;147:109941. <https://doi.org/10.1016/j.ecolind.2023.109941>
15. Anjum M., Siddique N., Younis H., Faiz Y., Shafique M.A., Mahnoor A., et al. Heavy metals and radionuclides in Islamabad's industrial area: A comprehensive analysis of soil and water pollution, source apportionment and health effects using statistical and geospatial tools. *Journal of Trace Elements and Minerals*. 2024;8:100127. <https://doi.org/10.1016/j.jtemin.2024.100127>
16. Hu J., Zhang J., Li Y. Exploring the spatial and temporal driving mechanisms of landscape patterns on habitat quality in a city undergoing rapid urbanization based on GTWR and MGWR: The case of Nanjing, China. *Ecological Indicators*. 2022;143:109333. <https://doi.org/10.1016/j.ecolind.2022.109333>
17. Wang S., Yao W., Ma Y., Shang E., Zhang S., Chen F., et al. Optimizing natural boundary definition and functional zoning in protected areas: An integrated framework encompassing species, landscapes and ecosystems. *Global Ecology and Conservation*. 2024;49:e02781. <https://doi.org/10.1016/j.gecco.2023.e02781>
18. Liu H., Zhang M., Du J., Zhou Y., Yi Y. Exploring zonation strategy in land management of urban agglomeration. *Ecological Indicators*. 2022;145:109664. <https://doi.org/10.1016/j.ecolind.2022.109664>
19. Khaniabadi Y. O., Goudarzi G., Daryanoosh S. M., Borgini A., Tittarelli A., De Marco A. Exposure to PM<sub>10</sub>, NO<sub>2</sub>, and O<sub>3</sub> and impacts on human health. *Environmental Science and Pollution Research*. 2017;24:2781–2789. <https://doi.org/10.1007/s11356-016-8038-6>
20. Cerneau J., Junqua G., Gonzalez C., Lopez-Ferber M., Mat N. Industrial ecology and the building of territorial knowledge: DEPART, a French research action program implemented in harbor territories. *Procedia – Social and Behavioral Sciences*. 2012;40:622–630. <https://doi.org/10.1016/j.sbspro.2012.03.240>
21. Zhao H., Xu X., Tang J., Wang Z., Miao C. Understanding the key factors and future trends of ecosystem service value to support the decision management in the cluster cities around the Yellow River floodplain area. *Ecological Indicators*. 2023;154:110544. <https://doi.org/10.1016/j.ecolind.2023.110544>
22. Zhao J., Yu Q., Xu C., Ma J., Liu W., Sun W., et al. Integrated approach for ecological restoration and ecological spatial network optimization with multiple ecosystem functions in mining areas. *Ecological Indicators*. 2023;156:111141. <https://doi.org/10.1016/j.ecolind.2023.111141>
23. Zhang P., Shi J. Slow recovery of natural ecosystems as an important factor restricting regional coordinated development. *Ecological Indicators*. 2024;158:111435. <https://doi.org/10.1016/j.ecolind.2023.111435>
24. Петров А. М., Магомедов Р. М., Савина С. В. Экологическая безопасность строительства в концепции устойчивого развития. *Строительные материалы и изделия*. 2023;6(1):5–17. <https://doi.org/10.58224/2618-7183-2023-6-1-5-17>
25. Wu X., Liu H., Liu W. Exploring the spatiotemporal evolution dynamic and influencing factor of green ecology transition for megacities: A case study of Chengdu, China. *Ecological Indicators*. 2024;158:111285. <https://doi.org/10.1016/j.ecolind.2023.111285>
26. Zhang D., Wu L., Huang S., Zhang Z., Ahmad F., Zhang G., et al. Ecology and environment of the Belt and Road under global climate change: A systematic review of spatial patterns, cost efficiency, and ecological footprints. *Ecological Indicators*. 2021;131:108237. <https://doi.org/10.1016/j.ecolind.2021.108237>
27. Ганзен Е. В. Исследование поверхности отклика интегрального потенциала капитального ремонта и реконструкции общественных зданий в системе нечеткого вывода. *Строительные материалы и изделия*. 2022;5(2):35–42. <https://doi.org/10.58224/2618-7183-2022-5-2-35-42>
28. Guo J., Rong Y., Zhu J., Yan Y., Du J., Zheng L., et al. Industrial development zoning with dual objectives of spatial development suitability and ecosystem service value: A case study in Xiaonanhai Hydropower Station basin. *Ecological Indicators*. 2024;158:111522. <https://doi.org/10.1016/j.ecolind.2023.111522>
29. Fuentes Barrera G. A., Gabarrell i Durany X., Rieradevall Pons J., Guerrero Erazo J. G. Trends in global research on industrial parks: A bibliometric analysis from 1996–2019. *Heliyon*. 2021;7(8):e07778. <https://doi.org/10.1016/j.heliyon.2021.e07778>

30. Gokul P. R., Mathew A., Bhosale A., Nair A. T. Spatio-temporal air quality analysis and PM<sub>2.5</sub> prediction over Hyderabad City, India using artificial intelligence techniques. *Ecological Informatics*. 2023;76:102067. <https://doi.org/10.1016/j.ecoinf.2023.102067>
31. Xue B., Xiao X., Li J. Identification method and empirical study of urban industrial spatial relationship based on POI big data: A case of Shenyang City, China. *Geography and Sustainability*. 2020;1(2):152–162. <https://doi.org/10.1016/j.geosus.2020.06.003>
32. Yin H., Guo B., Huang X., Huo Z., Zhao L. Scenario-based analysis for industrial project planning in the context of carbon peaking: Case study city, China. *Clean Energy Systems*. 2023;10:100134. <https://doi.org/10.1016/j.cesys.2023.100134>
33. David L. M., Nair P. R. Tropospheric column O<sub>3</sub> and NO<sub>2</sub> over the Indian region observed by Ozone Monitoring Instrument (OMI): Seasonal changes and long-term trends. *Atmospheric Environment*. 2013;65:25–39. <https://doi.org/10.1016/j.atmosenv.2012.09.033>
34. Martinez-Alier J. Mapping ecological distribution conflicts: The EJAtlas. *The Extractive Industries and Society*. 2021;8(4):100883. <https://doi.org/10.1016/j.exis.2021.02.003>
35. Sovacool B. K., Iskandarova M., Hall J. Industrializing theories: A thematic analysis of conceptual frameworks and typologies for industrial sociotechnical change in a low-carbon future. *Energy Research and Social Science*. 2023;97:102954. <https://doi.org/10.1016/j.erss.2023.102954>
36. Salat S., Bourdic L. Power laws for energy efficient and resilient cities. *Procedia Engineering*. 2011;21:1193–1198. <https://doi.org/10.1016/j.proeng.2011.11.2130>
37. Pai J.-T., Hu D., Liao W.-W. Research on eco-efficiency of industrial parks in Taiwan. *Energy Procedia*. 2018;152:691–697. <https://doi.org/10.1016/j.egypro.2018.09.232>
38. Yang S. Evaluation of urban ecological security model based on GIS sensing and MCR model. *Measurement: Sensors*. 2024;33:101206. <https://doi.org/10.1016/j.measen.2024.101206>
39. Nong K., Lin J., Sun D. Spatiotemporal patterns, effects, and the interactive driving mechanisms of urban sustainability based on the eco-efficiency framework: Evidence from Chinese prefecture-level cities. *Environmental Sustainability Indicators*. 2024;23:100391. <https://doi.org/10.1016/j.indic.2024.100391>
40. Sheina S. G., Khamanova A. A. Technique for the Russian Federation regional territories assessment used to create industrial parks network. *Procedia Engineering*. 2016;150:1960–1965. <https://doi.org/10.1016/j.proeng.2016.07.198>
41. Schlüter L., Mortensen L., Gjerding A.N., Kørnøv L. Can we replicate eco-industrial parks? Recommendations based on a process model of EIP evolution. *Journal of Cleaner Production*. 2023;429:139499. <https://doi.org/10.1016/j.jclepro.2023.139499>
42. Luo Q., Bao Y., Wang Z., Chen X., Wei W., Fang Z. Vulnerability assessment of urban remnant mountain ecosystems based on ecological sensitivity and ecosystem services. *Ecological Indicators*. 2023;151:110314. <https://doi.org/10.1016/j.ecolind.2023.110314>
43. Omelchenko E., Trushkova E., Sitnik S., Bogatina A. Study of the effectiveness of innovative air purification systems used in the design of road construction enterprises. *Transportation Research Procedia*. 2022;61:594–599. <https://doi.org/10.1016/j.trpro.2022.01.096>
44. Zhao Y., Li S., Li T., Chen X., Chen J., Wang K. Integrating improved ecosystem status assessment and ecosystem management urgency to identify important zones for ecological protection and restoration. *Ecological Indicators*. 2024;162:112033. <https://doi.org/10.1016/j.ecolind.2024.112033>
45. Tolstykh T., Gamidullaeva L., Shmeleva N., Gromov S., Ermolenko A. Megapolis as a symbiosis of socio-economic ecosystems: The role of collaboration. *Journal of Open Innovation: Technology, Market, and Complexity*. 2022;8(3):126. <https://doi.org/10.3390/joitmc8030126>
46. Wang L., Zheng H., Chen Y., Ouyang Z., Hu X. Systematic review of ecosystem services flow measurement: Main concepts, methods, applications and future directions. *Ecosystem Services*. 2022;58:101479. <https://doi.org/10.1016/j.ecoser.2022.101479>
47. Mugahed Amran Y. H., El-Zeadani M., Huei Lee Y., Yong Lee Y., Murali G., Fediuk R. Design innovation, efficiency and applications of structural insulated panels: A review. *Structures*. 2020;27:1358–1379. <https://doi.org/10.1016/j.istruc.2020.07.044>
48. Masoud A. A. Spatio-temporal patterns and trends of the air pollution integrating MERRA-2 and in situ air quality data over Egypt (2013–2021). *Air Quality, Atmosphere & Health*. 2023;16:1543–1570. <https://doi.org/10.1007/s11869-023-01357-6>



### Information about the authors

**Nikolay I. Shestakov**, Cand. Sci. (Engineering), Associate Professor, Associate Professor in the Department of Urban Planning, National Research Moscow State University of Civil Engineering, Moscow, Russian Federation, SHestakovNI@mgsu.ru, <https://orcid.org/0000-0002-6809-4993>

**Nina V. Danilina**, Dr. Sci. (Engineering), Associate Professor, Head of the Department of Urban Planning, Corresponding Member of the Russian Academy of Architecture and Construction Sciences, National Research Moscow State University of Civil Engineering, Moscow, Russian Federation, danilinanv@mgsu.ru, <https://orcid.org/0000-0002-9465-6435>

**Roman S. Fediuk**, Dr. Sci. (Engineering), Professor, Professor in the Department of Civil Engineering, Vladivostok State University; Researcher at the Far Eastern Scientific Research, Design and Technological Institute for Construction, Vladivostok, Russian Federation, roman44@yandex.ru, <https://orcid.org/0000-0002-2279-1240>

**Mohammad Hematibahar**, Postgraduate in the Department of Urban Planning, National Research Moscow State University of Civil Engineering, Moscow, Russian Federation, <https://orcid.org/0000-0002-0090-5745>

**Valery I. Petukhov**, Dr. Sci. (Engineering), Professor, Deputy Director of the Polytechnic Institute, Far Eastern Federal University, Vladivostok, Russian Federation, petukhov.vi@dvgu.ru, <https://orcid.org/0000-0002-0088-7567>

### Информация об авторах

**Шестаков Николай Игоревич**, канд. техн. наук, доцент, доцент кафедры градостроительства, Национальный исследовательский Московский государственный строительный университет, Москва, Российская Федерация, SHestakovNI@mgsu.ru, <https://orcid.org/0000-0002-6809-4993>

**Данилина Нина Васильевна**, д-р техн. наук, доцент, заведующая кафедрой градостроительства, член-корреспондент Российской академии архитектуры и строительных наук, Национальный исследовательский Московский государственный строительный университет, Москва, Российская Федерация, danilinanv@mgsu.ru, <https://orcid.org/0000-0002-9465-6435>

**Федюк Роман Сергеевич**, д-р техн. наук, профессор, профессор кафедры промышленного и гражданского строительства, Владивостокский государственный университет; научный сотрудник Дальневосточного научно-исследовательского института по строительству, Владивосток, Российская Федерация, roman44@yandex.ru, <https://orcid.org/0000-0002-2279-1240>

**Хематибахар Мухаммад**, аспирант кафедры градостроительства, Национальный исследовательский Московский государственный строительный университет, Москва, Российская Федерация, <https://orcid.org/0000-0002-0090-5745>

**Петухов Валерий Иванович**, д-р техн. наук, профессор, заместитель директора Политехнического института, Дальневосточный федеральный университет, Владивосток, Российская Федерация, petukhov.vi@dvgu.ru, <https://orcid.org/0000-0002-0088-7567>

Received 04 августа 2025, Approved 20 September 2025, Accepted for publication 25 September 2025

Получена 04 августа 2025 г., одобрена 20 сентября 2025 г., принята к публикации 25 сентября 2025 г.